

TEXAS-3X



5-20 cm

3D letters, lightboxes




UK
CA
CE



- luminous efficacy 92 lm/W
- for indoor and outdoor use
- 20 pcs in chain

DIMENSIONS

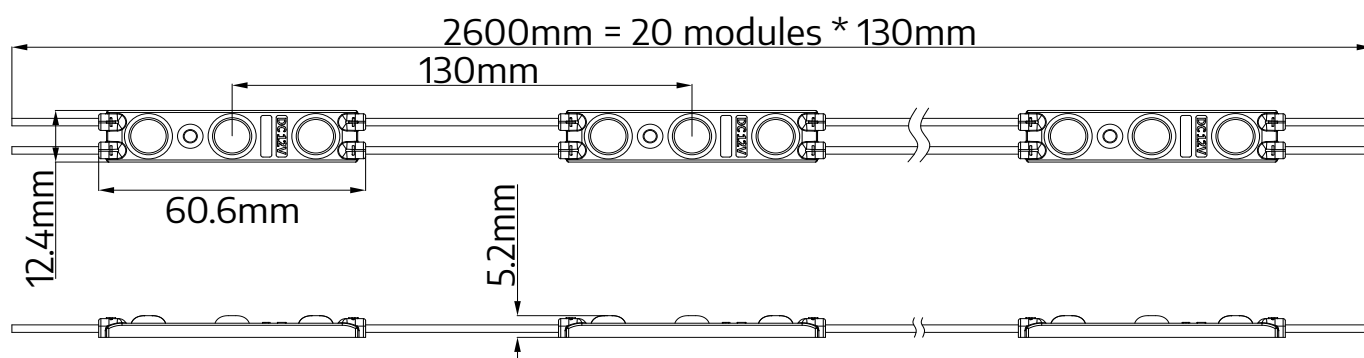

TECHNICAL SPECIFICATION

Parameter	Value
Rated voltage	12 V DC
Power consumption per module	0,72 W
Chain power consumption	14,4 W
Current consumption per module	60 mA
LED diodes	EPISTAR - 2835
Quantity of LEDs	3
Light color	X = W - white (6500K)
	X = CW - cool white (9500K)
	X = R - red (620nm)
	X = G - green (520nm)
	X = B - blue (460nm)
Flux	66 lm (W)
	71 lm (CW)
Flux density	92 lm/W (W)
	99 lm/W (CW)
Color rendering index CRI	≥80 (on request ≥90, ≥95)
Beam angle	160°
Current stabilization	No
Dimming	Yes
Module dimensions (L × W × H)	61 × 12 × 5 mm
Cable length	70 mm
Number of modules in 1 m	7,7
Box weight	17 kg
Montage	Adhesive tape / mounting screw
Lifetime	L70B50 > 50000h
Working temperature	-25°C ... +55°C
IP protection	IP67
Warranty	4 years

TEXAS-3X



CONNECTION DIAGRAM

One-side power input



Maximum number of modules 20 pcs



Two-side power input



Maximum number of modules 40 pcs

It is acceptable to connect multiple chains in parallel, as long as the power supply provides sufficient power.

ENERGY LABEL / BEAM ANGLE

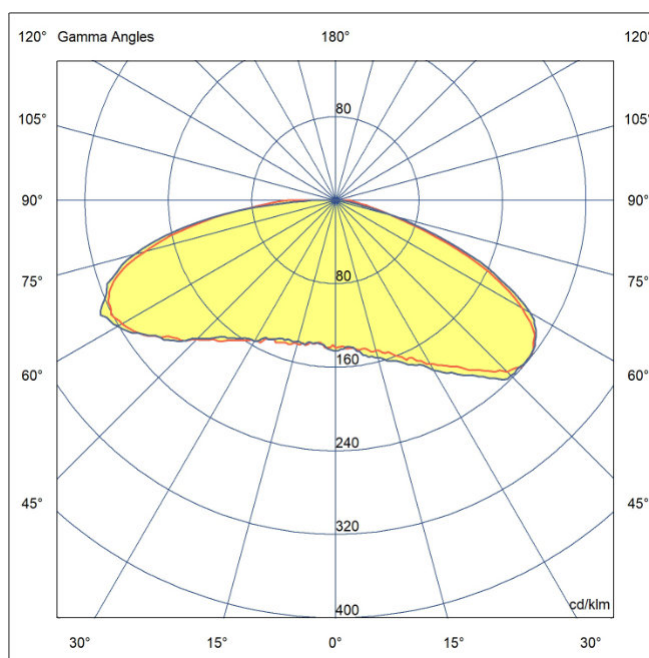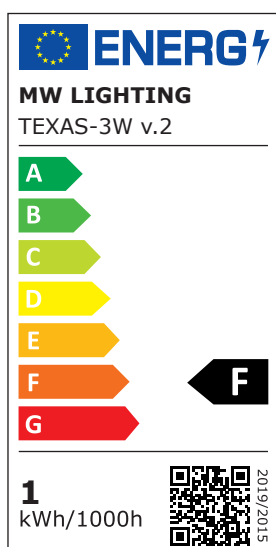


LIGHT COLOR / CCT

Abbreviation	Light color	CCT
WW	warm white	~3000K
NW	neutral white	~4000K
W	white	~6500K
CW	cold white	~9500K




APPLICATION

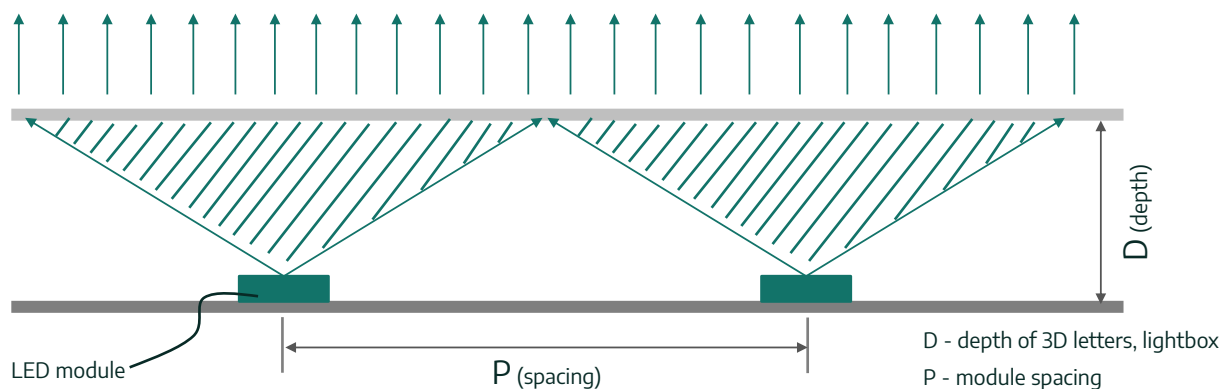

$$\text{optical performance proportion} = \frac{D}{P} = 1:1.5$$


PACKING



Chain
20 pcs



Bag
100 pcs



Box
1200 pcs